

## Attachment 0001

### Section C Statement of Work Figures


**Figure 1**

Component	Existing Durability (miles)	Goal Durability (miles)	
		Base Effort	Option Effort
RWBP	2100	2625	3105
GP	1000	1250	1500
TB	2100	2625	3105

**Figure 2**

Abrams T-158LL Prototype Track	Bushing Configuration (No. of Pitches)		Backer Stock Compound (No. of Pitches)		Track Pad Compound (No. of Pads)	
	DTL	2TPZ	A1	B1	1	2
Track Strand One	52		26	26	52	52
Track Strand Two		52	26	26	52	52
Spares	8	8	4	4	6	6
Total	120				110	110

**Figure 3**


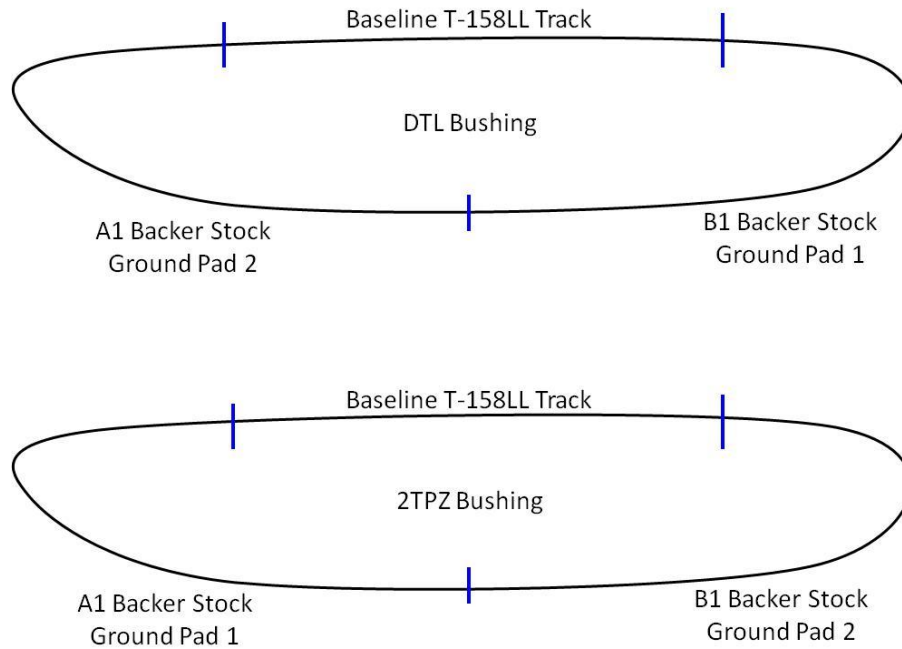


**Figure 4**

Abrams T-158LL Prototype Track	Bushing Compound Configuration (No. of Pitches)	Backer Stock Compound (No. of Pitches)	Track Pad Compound (No. of Pads)
	Down-selected Bushing Configuration	Down-Selected Backer Stock Configuration	Down-Selected Ground Pad Configuration
Track Strand One	52		104
Track Strand Two	52		104
Track Pitch Spares	24		40
Total	116		248

**Figure 5**

**T-3105F1**

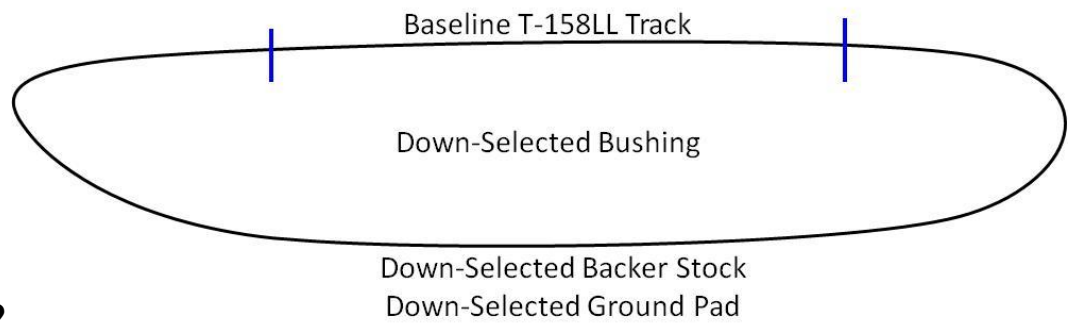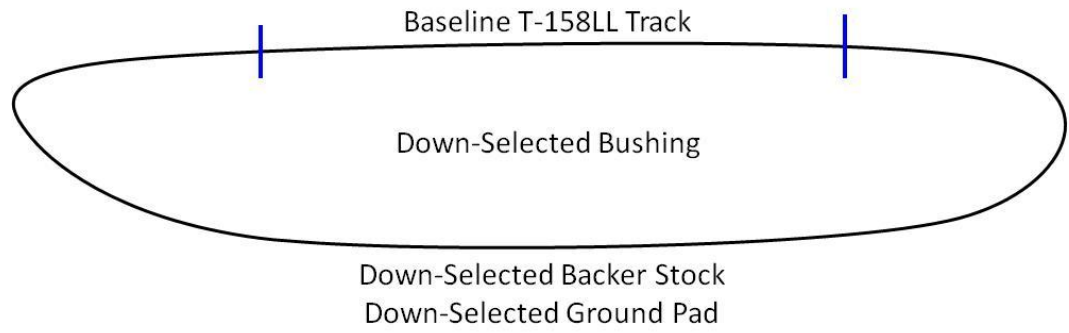

**T-3150 F2**